

REMOTE MONITORING SYSTEM

Realtime monitoring and data logging equipment to measure and log pH and TSS levels in water.

Remote Monitoring System (RMS) pH & TSS probes are installed in the final compartment of the WTS system, data is immediately viewable on unit and fed back to dedicated website for remote monitoring and data logging.


Real time telemetry & downloadable data logging Easy to use system - 110V power supply required Robust electrodes, ideal for the construction industry Self cleaning TSS probe

AVAILABLE FOR HIRE OR PURCHASE WITH THE KELLY TANKS WTS XXL LH SYSTEM

Maintenance In order to ensure that the mitigation, treatment and monitoring process is working correctly, intermittent checks should be undertaken on a weekly basis by trained site personnel.

Every few months we recommend RMS probes are rinsed and recalibrated if required.

SYSTEM IS DELIVERED CALIBRATED & READY TO USE -PLUG & GO

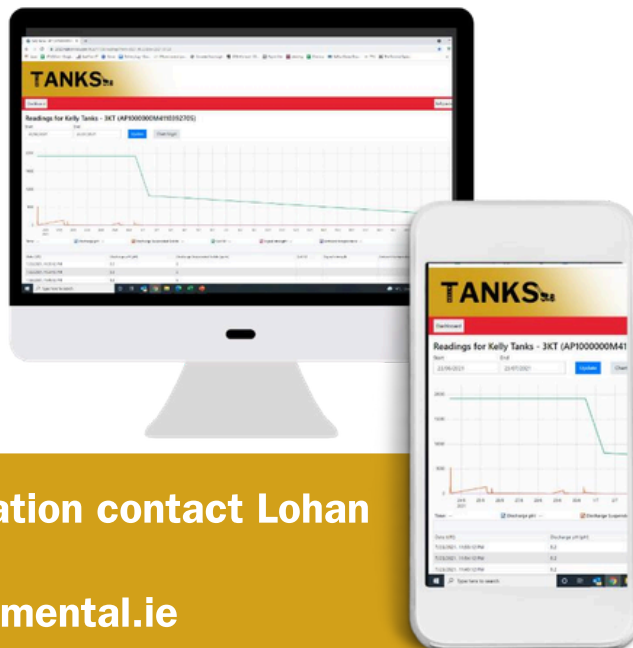

For further information contact Lohan Environmental : info@lohanenvironmental.ie

